



ENERGY STAR® RATINGS

LEGACY SERIES VINYL WINDOWS



2545 Series Legacy Picture Windows

Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
<i>SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]</i>										
2545PIC-GO1	3/3mm	1/2"	2	-	0.63	1.50	3.79	0.33	25	1
2545PIC-GO2	3/3mm	1/2"	2	5/16"	0.60	1.56	3.64	0.32	24	1
2545PIC-GO3	3/3mm	1/2"	2	5/8"	0.58	1.60	3.55	0.31	22	1
2545PIC-GO34	3/3mm	1/2"	2	SDL	0.55	1.56	3.64	0.29	23	1
<i>SolarGuard in Triple Glaze [SolarBan-60/Clear/Clear Argon Filled]</i>										
2545PIC-GO4	3/3/3mm	1/2"	2	-	0.58	1.15	4.94	0.31	33	1 2 3
2545PIC-GO5	3/3/3mm	1/2"	2	5/16"	0.55	1.18	4.81	0.29	31	1 2 3
2545PIC-GO6	3/3/3mm	1/2"	2	5/8"	0.53	1.19	4.77	0.28	30	1 2 3
2545PIC-GO7	4/4/4mm	7/16"	2	-	0.57	1.17	4.85	0.30	32	1 2 3
2545PIC-GO8	4/4/4mm	7/16"	2	5/16"	0.55	1.20	4.73	0.29	30	1 2 3
2545PIC-GO9	4/4/4mm	7/16"	2	5/8"	0.52	1.22	4.65	0.28	29	1 2
2545PIC-GO39	3/3/3mm	1/2"	2	SDL	0.50	1.18	4.81	0.27	30	1 2 3
<i>SolarGuard2 in Triple Glaze [SolarBan-60/Clear/SolarBan-60 Argon filled]</i>										
2545PIC-GO44	3/3/3mm	1/2"	2 & 5	-	0.51	0.84	6.76	0.29	38	1 2 3
2545PIC-GO45	3/3/3mm	1/2"	2 & 5	5/16"	0.49	0.87	6.53	0.27	37	1 2 3
2545PIC-GO46	3/3/3mm	1/2"	2 & 5	5/8"	0.47	0.90	6.31	0.26	35	1 2 3
2545PIC-GO47	3/3/3mm	1/2"	2 & 5	SDL	0.44	1.90	6.31	0.25	35	1 2 3
<i>SolarPlus in Double Glaze [Clear/Comfort E-PS Argon Filled]</i>										
2545PIC-GO16	3/3mm	1/2"	3	-	0.58	1.67	3.40	0.54	34	1 2 3
2545PIC-GO17	3/3mm	1/2"	3	5/16"	0.55	1.72	3.30	0.51	32	1 2
2545PIC-GO18	3/3mm	1/2"	3	5/8"	0.53	1.75	3.24	0.49	30	1 2
2545PIC-GO48	3/3mm	1/2"	3	SDL	0.56	1.75	3.24	0.53	33	1 2
<i>SolarPlus in Triple Glaze [Clear/Clear/Comfort E-PS Argon Filled]</i>										
2545PIC-GO25	3/3/3mm	1/2"	5	-	0.53	1.25	4.54	0.49	41	1 2 3
2545PIC-GO26	3/3/3mm	1/2"	5	5/16"	0.50	1.27	4.47	0.47	39	1 2 3
2545PIC-GO27	3/3/3mm	1/2"	5	5/8"	0.48	1.29	4.40	0.44	37	1 2 3
2545PIC-GO28	4/4/4mm	7/16"	5	-	0.53	1.28	4.44	0.48	39	1 2 3
2545PIC-GO29	4/4/4mm	7/16"	5	5/16"	0.50	1.30	4.37	0.45	38	1 2 3
2545PIC-GO30	4/4/4mm	7/16"	5	5/8"	0.41	1.33	4.27	0.37	32	1 2
2545PIC-GO49	3/3/3mm	1/2"	5	SDL	0.51	1.26	4.51	0.47	40	1 2 3
<i>SolarPlus2 in Triple Glaze [Comfort E-PS/Clear/Comfort E-PS Argon Filled]</i>										
2545PIC-GO50	3/3/3mm	1/2"	2 & 5	-	0.54	1.00	5.68	0.49	46	1 2 3
2545PIC-GO51	3/3/3mm	1/2"	2 & 5	5/16"	0.52	1.02	5.57	0.46	44	1 2 3
2545PIC-GO52	3/3/3mm	1/2"	2 & 5	5/8"	0.50	1.05	5.41	0.44	43	1 2 3
2545PIC-GO53	3/3/3mm	1/2"	2 & 5	SDL	0.47	1.04	5.46	0.42	42	1 2 3

Legacy Picture (2545 Series)

Legacy Fixed

Legacy Casement

Legacy Awning




2630Series Legacy Fixed Windows



Supreme Windows

ENERGY STAR® RATINGS

Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]										
2630FIX-GO1	3/3mm	1/2"	2	-	0.53	1.48	3.84	0.29	24	1
2630FIX-GO1	3/3mm	1/2"	2	5/16"	0.50	1.54	3.69	0.28	22	1
2630FIX-GO3	3/3mm	1/2"	2	5/8"	0.51	1.58	3.59	0.27	21	1
2630FIX-GO34	3/3mm	1/2"	2	SDL	0.48	1.55	3.66	0.26	21	1
SolarGuard in Triple Glaze [SolarBan-60/Clear/Clear Argon Filled]										
2630FIX-GO4	3/3/3mm	1/2"	2	-	0.49	1.17	4.85	0.27	30	1 2 3
2630FIX-GO5	3/3/3mm	1/2"	2	5/16"	0.46	1.20	4.73	0.26	29	1 2 3
2630FIX-GO6	3/3/3mm	1/2"	2	5/8"	0.50	1.21	4.69	0.25	28	1 2
2630FIX-GO7	4/4/4mm	7/16"	2	-	0.48	1.19	4.77	0.27	29	1 2 3
2630FIX-GO8	4/4/4mm	7/16"	2	5/16"	0.46	1.22	4.65	0.26	28	1 2
2630FIX-GO9	4/4/4mm	7/16"	2	5/8"	0.45	1.24	4.58	0.24	27	1 2
2630FIX-GO39	3/3/3mm	1/2"	2	SDL	0.44	1.20	4.73	0.23	27	1 2 3
SolarGuard2 in Triple Glaze [SolarBan-60/Clear/SolarBan-60 Argon filled]										
2630FIX-GO44	3/3/3mm	1/2"	2 & 5	-	0.45	0.90	6.31	0.25	35	1 2 3
2630FIX-GO45	3/3/3mm	1/2"	2 & 5	5/16"	0.51	0.93	6.11	0.24	34	1 2 3
2630FIX-GO46	3/3/3mm	1/2"	2 & 5	5/8"	0.49	0.96	5.91	0.23	32	1 2 3
2630FIX-GO47	3/3/3mm	1/2"	2 & 5	SDL	0.47	0.96	5.91	0.22	32	1 2 3
SolarPlus in Double Glaze [Clear/Comfort E-PS Argon Filled]										
2630FIX-GO16	3/3mm	1/2"	3	-	0.66	1.71	3.32	0.61	38	1 2 3
2630FIX-GO17	3/3mm	1/2"	3	5/16"	0.63	1.76	3.23	0.58	35	1 2 3
2630FIX-GO18	3/3mm	1/2"	3	5/8"	0.60	1.80	3.15	0.56	33	1 2
2630FIX-GO48	3/3mm	1/2"	3	SDL	0.49	1.71	3.32	0.47	30	1 2
SolarPlus in Triple Glaze [Clear/Clear/Comfort E-PS Argon Filled]										
2630FIX-GO25	3/3/3mm	1/2"	5	-	0.59	1.23	4.62	0.55	45	1 2 3
2630FIX-GO26	3/3/3mm	1/2"	5	5/16"	0.57	1.25	4.54	0.53	43	1 2 3
2630FIX-GO27	3/3/3mm	1/2"	5	5/8"	0.54	1.28	4.44	0.50	41	1 2 3
2630FIX-GO28	4/4/4mm	7/16"	5	-	0.60	1.27	4.47	0.54	43	1 2 3
2630FIX-GO29	4/4/4mm	7/16"	5	5/16"	0.57	1.29	4.40	0.52	41	1 2 3
2630FIX-GO30	4/4/4mm	7/16"	5	5/8"	0.55	1.32	4.30	0.49	40	1 2 3
2630FIX-GO49	3/3/3mm	1/2"	5	SDL	0.45	1.27	4.47	0.42	36	1 2 3
SolarPlus2 in Triple Glaze [Comfort E-PS/Clear/Comfort E-PS Argon Filled]										
2630FIX-GO50	3/3/3mm	1/2"	2 & 5	-	0.48	1.04	5.46	0.43	42	1 2 3
2630FIX-GO51	3/3/3mm	1/2"	2 & 5	5/16"	0.46	1.06	5.36	0.41	40	1 2 3
2630FIX-GO52	3/3/3mm	1/2"	2 & 5	5/8"	0.44	1.08	5.26	0.39	39	1 2 3
2630FIX-GO53	3/3/3mm	1/2"	2 & 5	SDL	0.41	1.08	5.26	0.37	38	1 2 3

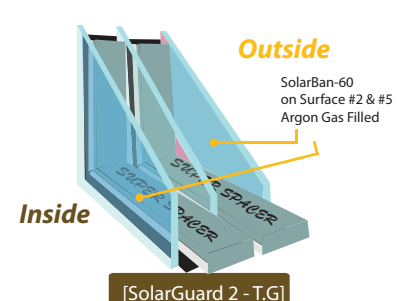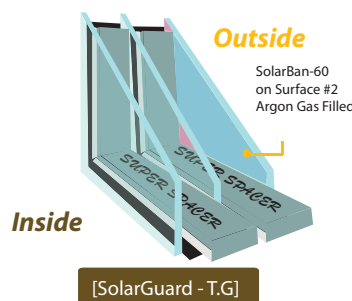


2600 Series Legacy Casement Windows




Supreme Windows

ENERGY STAR® RATINGS


Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]										
2600CAS-GO1	3/3mm	1/2"	2	-	0.47	1.49	3.81	0.25	21	1
2600CAS-GO2	3/3mm	1/2"	2	5/16"	0.45	1.53	3.71	0.24	20	1
2600CAS-GO3	3/3mm	1/2"	2	5/8"	0.43	1.56	3.64	0.23	19	1
2600CAS-GO34	3/3mm	1/2"	2	SDL	0.42	1.53	3.71	0.22	19	1
SolarGuard in Triple Glaze [SolarBan-60/Clear/Clear Argon Filled]										
2600CAS-GO4	3/3/3mm	1/2"	2	-	0.43	1.20	4.73	0.23	27	1 2 3
2600CAS-GO5	3/3/3mm	1/2"	2	5/16"	0.41	1.22	4.65	0.22	26	1 2
2600CAS-GO6	3/3/3mm	1/2"	2	5/8"	0.40	1.23	4.62	0.21	25	1 2
2600CAS-GO7	4/4/4mm	7/16"	2	-	0.43	1.22	4.65	0.23	26	1 2
2600CAS-GO8	4/4/4mm	7/16"	2	5/16"	0.41	1.24	4.58	0.22	25	1 2
2600CAS-GO9	4/4/4mm	7/16"	2	5/8"	0.39	1.26	4.51	0.21	24	1 2
2600CAS-GO39	3/3/3mm	1/2"	2	SDL	0.38	1.22	4.65	0.20	25	1 2
SolarGuard2 in Triple Glaze [SolarBan-60/Clear/SolarBan-60 Argon filled]										
2600CAS-GO44	3/3/3mm	1/2"	2 & 5	-	0.38	0.97	5.85	0.22	31	1 2 3
2600CAS-GO45	3/3/3mm	1/2"	2 & 5	5/16"	0.37	0.99	5.74	0.21	30	1 2 3
2600CAS-GO46	3/3/3mm	1/2"	2 & 5	5/8"	0.35	1.01	5.62	0.20	29	1 2 3
2600CAS-GO47	3/3/3mm	1/2"	2 & 5	SDL	0.33	1.01	5.62	0.19	29	1 2 3
SolarPlus in Double Glaze [Clear/Comfort E-PS Argon Filled]										
2600CAS-GO16	3/3mm	1/2"	3	-	0.49	1.64	3.46	0.45	30	1 2
2600CAS-GO17	3/3mm	1/2"	3	5/16"	0.47	1.68	3.38	0.44	28	1
2600CAS-GO18	3/3mm	1/2"	3	5/8"	0.45	1.71	3.32	0.42	27	1
2600CAS-GO48	3/3mm	1/2"	3	SDL	0.43	1.67	3.40	0.41	26	1
SolarPlus in Triple Glaze [Clear/Clear/Comfort E-PS Argon Filled]										
2600CAS-GO25	3/3/3mm	1/2"	5	-	0.53	1.25	4.54	0.49	41	1 2 3
2600CAS-GO26	3/3/3mm	1/2"	5	5/16"	0.50	1.27	4.47	0.47	39	1 2 3
2600CAS-GO27	3/3/3mm	1/2"	5	5/8"	0.48	1.29	4.40	0.44	37	1 2 3
2600CAS-GO28	4/4/4mm	7/16"	5	-	0.53	1.28	4.44	0.48	39	1 2 3
2600CAS-GO29	4/4/4mm	7/16"	5	5/16"	0.50	1.30	4.37	0.45	38	1 2 3
2600CAS-GO30	4/4/4mm	7/16"	5	5/8"	0.41	1.33	4.27	0.37	32	1 2
2600CAS-GO49	3/3/3mm	1/2"	5	SDL	0.38	1.28	4.44	0.36	32	1 2
SolarPlus2 in Triple Glaze [Comfort E-PS/Clear/Comfort E-PS Argon Filled]										
2600CAS-GO50	3/3/3mm	1/2"	2 & 5	-	0.41	1.08	5.26	0.36	37	1 2 3
2600CAS-GO51	3/3/3mm	1/2"	2 & 5	5/16"	0.39	1.10	5.16	0.35	36	1 2 3
2600CAS-GO52	3/3/3mm	1/2"	2 & 5	5/8"	0.37	1.11	5.12	0.38	37	1 2 3
2600CAS-GO53	3/3/3mm	1/2"	2 & 5	SDL	0.35	1.11	5.12	0.32	34	1 2 3



[SolarPlus(D.G.)]



[SolarPlus(T.G.)]

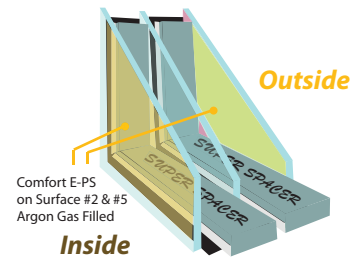

[SolarPlus 2(T.G.)]

Legacy Picture

Legacy Fixed

Legacy Casement (2600 Series)

Legacy Awning

2600 Series Legacy Awning Windows



Supreme Windows

ENERGY STAR® RATINGS

Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
------------	-----------------	-----------	----------------	--------	----	----------------	------------------	------	----------------	-------------------

SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]

2600AWN-GO1	3/3mm	1/2"	2	-	0.47	1.48	3.84	0.25	22	1
2600AWN-GO2	3/3mm	1/2"	2	5/16"	0.45	1.51	3.76	0.24	20	1
2600AWN-GO3	3/3mm	1/2"	2	5/8"	0.43	1.54	3.69	0.23	19	1
2600AWN-GO34	3/3mm	1/2"	2	SDL	0.42	1.51	3.76	0.22	19	1

SolarGuard in Triple Glaze [SolarBan-60/Clear/Clear Argon Filled]

2600AWN-GO4	3/3/3mm	1/2"	2	-	0.43	1.19	4.77	0.23	27	1 2 3
2600AWN-GO5	3/3/3mm	1/2"	2	5/16"	0.41	1.20	4.73	0.22	26	1 2 3
2600AWN-GO6	3/3/3mm	1/2"	2	5/8"	0.40	1.21	4.69	0.21	26	1 2
2600AWN-GO7	4/4/4mm	7/16"	2	-	0.43	1.21	4.69	0.23	26	1 2
2600AWN-GO8	4/4/4mm	7/16"	2	5/16"	0.41	1.22	4.65	0.22	26	1 2
2600AWN-GO9	4/4/4mm	7/16"	2	5/8"	0.39	1.24	4.58	0.21	25	1 2
2600AWN-GO39	3/3/3mm	1/2"	2	SDL	0.38	1.19	4.77	0.20	25	1 2 3

SolarGuard2 in Triple Glaze [SolarBan-60/Clear/SolarBan-60 Argon filled]

2600AWN-GO44	3/3/3mm	1/2"	2 & 5	-	0.38	0.95	5.98	0.22	31	1 2 3
2600AWN-GO45	3/3/3mm	1/2"	2 & 5	5/16"	0.37	0.97	5.85	0.21	31	1 2 3
2600AWN-GO46	3/3/3mm	1/2"	2 & 5	5/8"	0.35	0.99	5.74	0.20	30	1 2 3
2600AWN-GO47	3/3/3mm	1/2"	2 & 5	SDL	0.33	0.98	5.79	0.19	29	1 2 3

SolarPlus in Double Glaze [Clear / Comfort E-PS Argon Filled]

2600AWN-GO16	3/3mm	1/2"	3	-	0.49	1.64	3.46	0.46	30	1 2
2600AWN-GO17	3/3mm	1/2"	3	5/16"	0.47	1.66	3.42	0.44	29	1 2
2600AWN-GO18	3/3mm	1/2"	3	5/8"	0.45	1.69	3.36	0.42	27	1
2600AWN-GO48	3/3mm	1/2"	3	SDL	0.43	1.59	3.57	0.41	28	1

SolarPlus in Triple Glaze [Clear/Clear/Comfort E-PS Argon Filled]

2600AWN-GO25	3/3/3mm	1/2"	5	-	0.44	1.25	4.54	0.41	36	1 2 3
2600AWN-GO26	3/3/3mm	1/2"	5	5/16"	0.43	1.26	4.51	0.40	35	1 2 3
2600AWN-GO27	3/3/3mm	1/2"	5	5/8"	0.41	1.28	4.44	0.38	34	1 2 3
2600AWN-GO28	4/4/4mm	7/16"	5	-	0.45	1.29	4.40	0.40	35	1 2 3
2600AWN-GO29	4/4/4mm	7/16"	5	5/16"	0.43	1.30	4.37	0.39	34	1 2 3
2600AWN-GO30	4/4/4mm	7/16"	5	5/8"	0.41	1.31	4.33	0.37	33	1 2
2600AWN-GO49	3/3/3mm	1/2"	5	SDL	0.38	1.26	4.51	0.36	33	1 2

SolarPlus2 in Triple Glaze [Comfort E-PS/Clear/Comfort E-PS Argon Filled]

2600AWN-GO50	3/3/3mm	1/2"	2 & 5	-	0.41	1.07	5.31	0.37	37	1 2 3
2600AWN-GO51	3/3/3mm	1/2"	2 & 5	5/16"	0.39	1.08	5.26	0.35	36	1 2 3
2600AWN-GO52	3/3/3mm	1/2"	2 & 5	5/8"	0.37	1.10	5.16	0.34	35	1 2 3
2600AWN-GO53	3/3/3mm	1/2"	2 & 5	SDL	0.35	1.09	5.21	0.32	34	1 2 3




LEGEND

Standard: CSA A440.2 "Energy Performance of Windows"
 Glass Thickness allowed within a range of ±1.3mm
 VT: Visual Transmittance (0 to 0.99)
 SHGC: Solar Heat Gain Coefficient (0 to 0.99)



Supreme Windows (Calgary) Inc.
 4705-102Ave. S.E., Calgary, Alberta, T2C 2X7
 Tel. (403) 279-2797 / Fax. (403) 236-1681

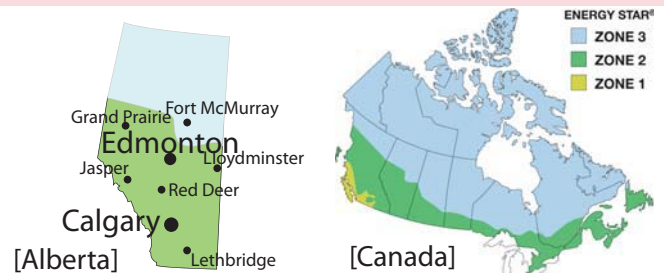

Legacy Picture

Legacy Fixed

Legacy Casement

Legacy Awning (2600 Series)



ENERGY STAR® RATINGS

CLASSIC SERIES VINYL WINDOWS



Single Hung

Classic Picture (1638 Series)

Reno Picture (6490 Series)

Slider

1638 Series Classic Picture Windows

Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
<i>SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]</i>										
1638PIC-GO54	3/3mm	1/2"	2	-	0.66	1.57	3.62	0.35	26	1

<i>SolarPlus in Double Glaze [Clear/Comfort E-PS Argon Filled]</i>										
1638PIC-GO60	3/3mm	1/2"	3	-	0.68	1.79	3.17	0.64	38	1 2 3
1638PIC-GO61	3/3mm	1/2"	3	5/16"	0.65	1.83	3.10	0.61	35	1 2 3
1638PIC-GO62	3/3mm	1/2"	3	5/8"	0.62	1.86	3.05	0.59	33	1 2




<i>Solar-5 in Double Glaze [SolarBan-60/Comfort E-PS Argon Filled]</i>										
1638PIC-GO63	3/3mm	1/2"	2 & 4	-	0.60	1.30	4.37	0.33	31	1 2
1638PIC-GO64	3/3mm	1/2"	2 & 4	5/16"	0.58	1.35	4.21	0.32	29	1 2
1638PIC-GO65	3/3mm	1/2"	2 & 4	5/8"	0.55	1.37	4.14	0.30	27	1 2

6490 Series Classic /Reno Picture Windows

Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
<i>SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]</i>										
6490PIC-GO54	3/3mm	1/2"	2	-	0.62	1.50	3.79	0.33	26	1
6490PIC-GO55	3/3mm	1/2"	2	5/16"	0.59	1.55	3.66	0.32	24	1
6490PIC-GO56	3/3mm	1/2"	2	5/8"	0.57	1.59	3.57	0.30	23	1

<i>SolarPlus in Double Glaze [Clear/Comfort E-PS Argon Filled]</i>										
6490PIC-GO60	3/3mm	1/2"	3	-	0.64	1.70	3.34	0.60	38	1 2 3
6490PIC-GO61	3/3mm	1/2"	3	5/16"	0.62	1.75	3.24	0.58	35	1 2 3
6490PIC-GO62	3/3mm	1/2"	3	5/8"	0.59	1.77	3.21	0.55	33	1 2 3

<i>Solar-5 in Double Glaze [SolarBan-60/Comfort E-PS Argon Filled]</i>										
6490PIC-GO63	3/3mm	1/2"	2 & 4	-	0.57	1.25	4.54	0.31	31	1 2
6490PIC-GO64	3/3mm	1/2"	2 & 4	5/8"	0.55	1.30	4.37	0.30	29	1 2
6490PIC-GO65	3/3mm	1/2"	2 & 4	5/16"	0.52	1.32	4.30	0.29	28	1 2

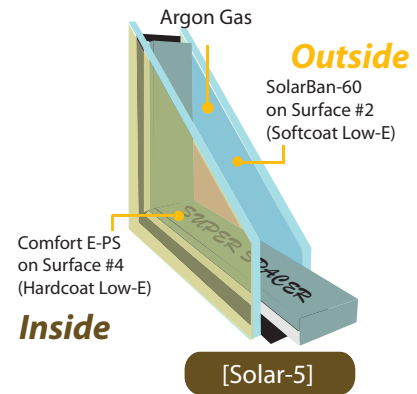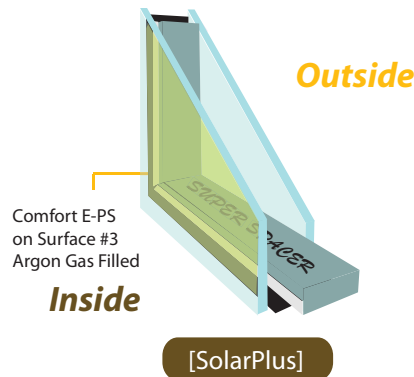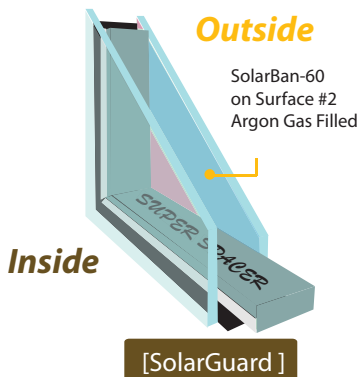

6490 Series Classic / Reno Single Hung Windows



Supreme Windows ENERGY STAR® RATINGS

Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
------------	-----------------	-----------	----------------	--------	----	----------------	------------------	------	----------------	-------------------

SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]

6490VS-GO57	3/3mm	1/2"	3	-	0.56	1.63	3.45	0.36	25	1
-------------	-------	------	---	---	------	------	------	------	----	---

SolarPlus in Double Glaze [Clear/Comfort E-PS Argon Filled]

6490VS-GO60	3/3mm	1/2"	3	-	0.59	1.81	3.14	0.55	31	1 2
6490VS-GO61	3/3mm	1/2"	3	5/16"	0.56	1.85	3.07	0.53	29	1 2
6490VS-GO62	3/3mm	1/2"	3	5/8"	0.53	1.87	3.04	0.50	27	1

Solar-5 in Double Glaze [SolarBan-60/Comfort E-PS Argon Filled]

6490VS-GO63	3/3mm	1/2"	2 & 4	-	0.52	1.40	4.06	0.29	25	1 2
6490VS-GO64	3/3mm	1/2"	2 & 4	5/16"	0.50	1.44	3.94	0.27	24	1
6490VS-GO65	3/3mm	1/2"	2 & 4	5/8"	0.47	1.46	3.89	0.26	23	1

6490 Series Classic / Reno Slider Windows

Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
------------	-----------------	-----------	----------------	--------	----	----------------	------------------	------	----------------	-------------------

SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]

6490HS-GO57	3/3mm	1/2"	3	-	0.56	1.64	3.45	0.36	25	1
-------------	-------	------	---	---	------	------	------	------	----	---

SolarPlus in Double Glaze [Clear/Comfort E-PS Argon Filled]

6490HS-GO60	3/3mm	1/2"	3	-	0.59	1.83	3.10	0.55	31	1 2
6490HS-GO61	3/3mm	1/2"	3	5/16"	0.56	1.86	3.05	0.53	29	1 2
6490HS-GO62	3/3mm	1/2"	3	5/8"	0.53	1.88	3.02	0.50	27	1

Solar-5 in Double Glaze [SolarBan-60/Comfort E-PS Argon Filled]

6490HS-GO63	3/3mm	1/2"	2 & 4	-	0.52	1.42	4.00	0.29	25	1
6490HS-GO64	3/3mm	1/2"	2 & 4	5/16"	0.50	1.45	3.92	0.27	24	1
6490HS-GO65	3/3mm	1/2"	2 & 4	5/8"	0.47	1.47	3.86	0.26	22	1

**LEGEND**

Standard: CSA A440.2 "Energy Performance of Windows"

Glass Thickness allowed within a range of $\pm 1.3\text{mm}$

VT: Visual Transmittance (0 to 0.99)

SHGC: Solar Heat Gain Coefficient (0 to 0.99)

**Supreme Windows**4705-102 Ave. S.E., Calgary, Alberta, T2C 2X7
Tel. (403) 279-2797 / Fax. (403) 236-1681ENERGY STAR®
ZONE 3
ZONE 2
ZONE 1

[Alberta]

[Canada]